


HDPE drainage channel Neo 100H (100/150) with flat edges

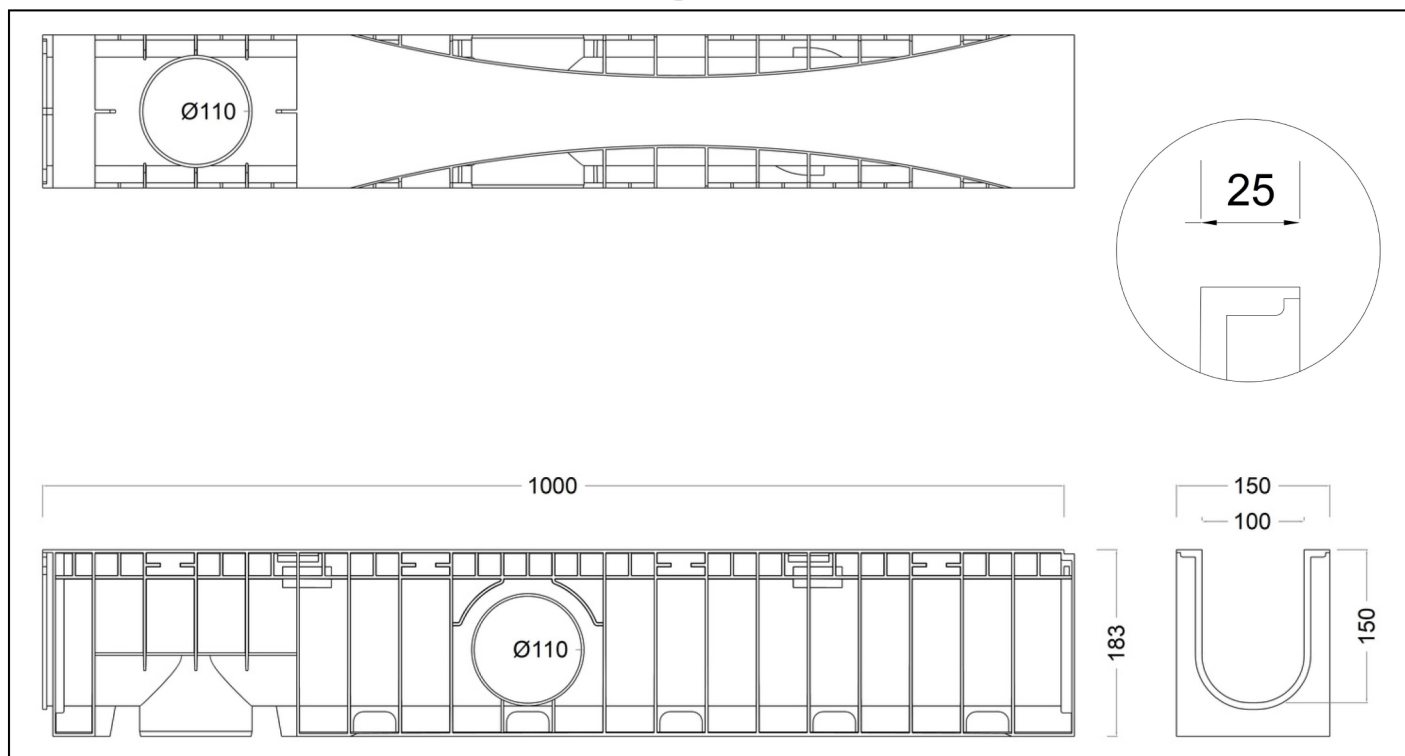

The connection between channels is made using a tongue and groove interlock and joint waterproofness is ensured by using a bituminous-based mastic. Alternatively, complete impermeability can be reached by heat welding the joint.

Dimensions and technical specifications - Type M EN1433

Overall Length / Overall Width (mm)	1000 / 150
Internal Height / Overall Height (mm)	150 / 183
Internal Width - clear opening (mm)	100
Depth of flat edges (mm)	25
Side / Vertical outlets (Ø mm)	2xØ110 - 1xØ110
Materials	HDPE Black
Channel weight (Kg)	2,5
Drainage section (cm ²)	140,6
Volume (dm ³)	14,06
Gratings fixing system	Fixing clips N. 2 bars per m.

N.B. Dimensions and weights are subject to normal manufacturing tolerances.


Compatible gratings EN1433 A15 ÷ C250

Code / model	Code / model
GRP100NZF / Galvanized slotted grating A15	GRGS100NMB / Ductile iron mesh grating B125
GRM100NQBZ / Galvanized mesh grating 30/30 B125	GRGS100NC / Ductile iron 10mm slot grating C250
GRM100NRBZ / Galvanized mesh grating 30/10 B125	GRGS100NC6 / Ductile iron 6mm slot grating C250





Galvanized mesh grating Neo 100R heel-proof mesh (30/10) B125

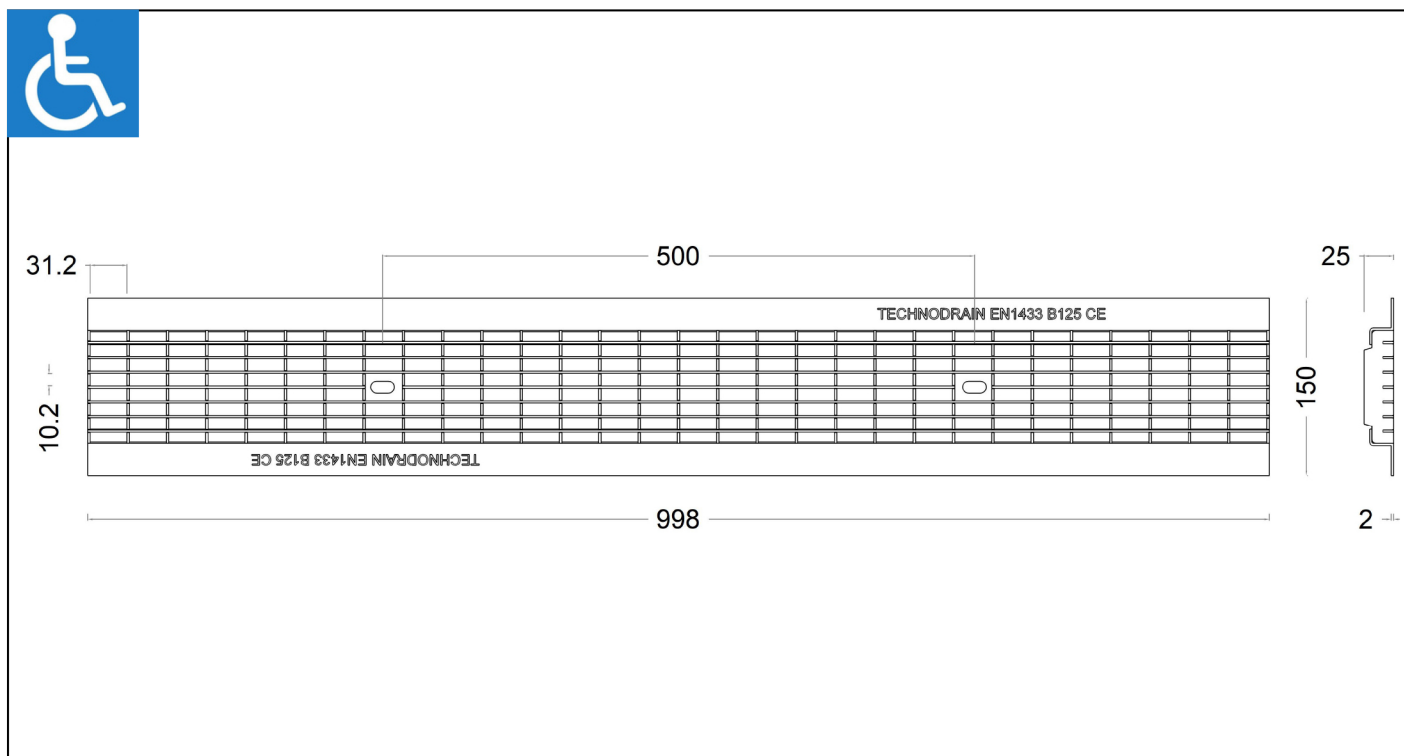

Dimensions and technical specifications

Lenght / Overall width (mm)	998 / 150
Height / Overall height (mm)	25 / 2
Internal width (mm)	100
Material	Galvanized steel
Weight (Kg)	3,90
Mesh size (mm)	31,2x10,2
Drainage area (cm ²)	1008
Locking	N. 2 tie bars per grating
Surface coating	Galvanized
Loading class (EN 1433)	B125

N.B. Dimensions and weights are subjected to normal manufacturing tolerances.

Compatible Technodrain channels

Code / model

CA100NS - Neo 100S (100/75)

CA100NH - Neo 100H (100/150)

