


HDPE drainage channel Neomax 150H (150/150) with galvanized protection edges

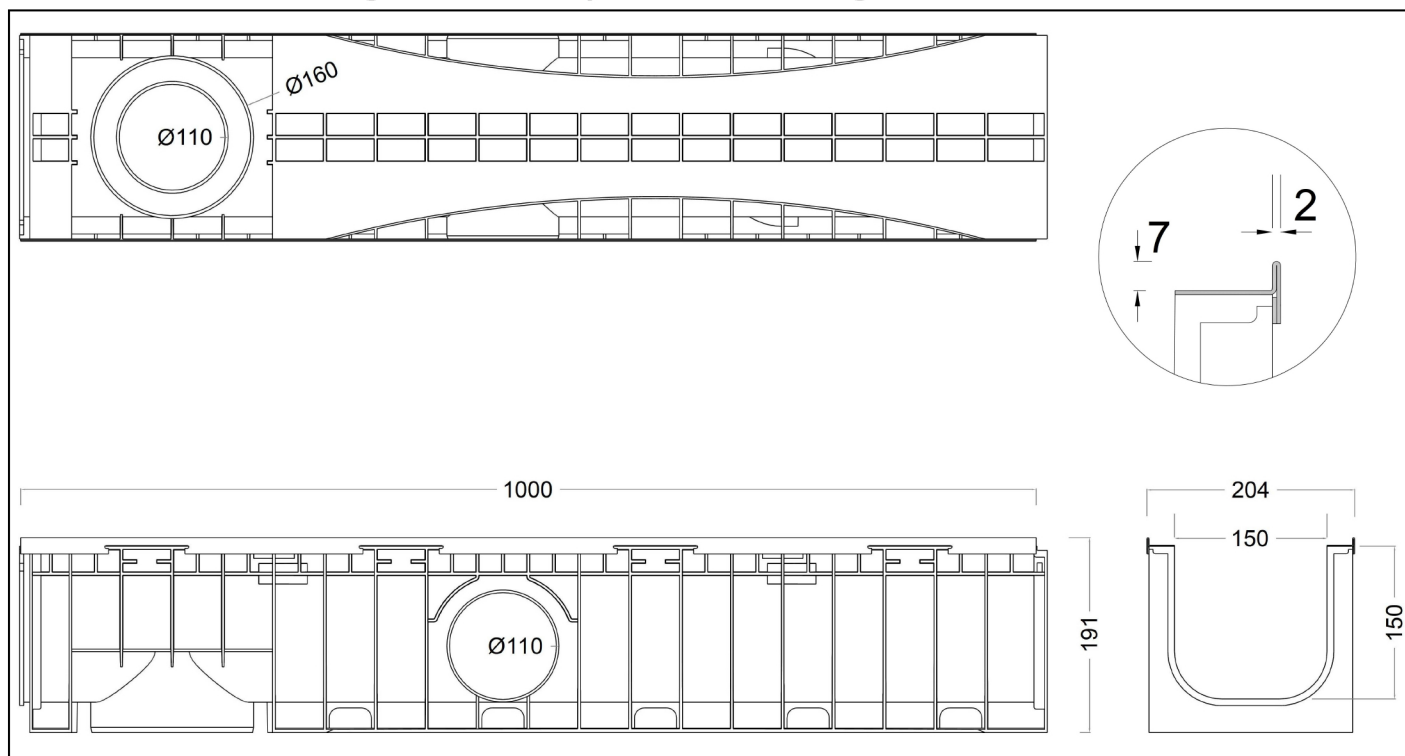

The connection between channels is made using a tongue and groove interlock and joint waterproofness is ensured by using a bituminous-based mastic. Alternatively, complete impermeability can be reached by heat welding the joint.

Dimensions and technical specifications - Type M EN1433

Overall Length / Overall Width including edges (mm)	1000 / 204
Internal Height / Overall Height including edges (mm)	150 / 191
Internal Width - clear opening (mm)	150
Depth / Thickness of galv. protection edges (mm)	7 / 2
Side / Vertical outlets (Ø mm)	2xØ110 - 1xØ110/160
Materials	HDPE Black / Galvanized steel
Channel weight with protection edges (Kg)	3,7
Drainage section (cm ²)	215,6
Volume (dm ³)	21,56
Gratings fixing system	N. 2 bars per m.

N.B. Dimensions and weights are subject to normal manufacturing tolerances.

Compatible gratings EN1433 B125÷C250

Code / model


GRGS150NMB / Ductile iron mesh grating B125

GRGS150NC / Ductile iron grating 10mm slot C250





Ductile iron mesh grating NEO 150 B125

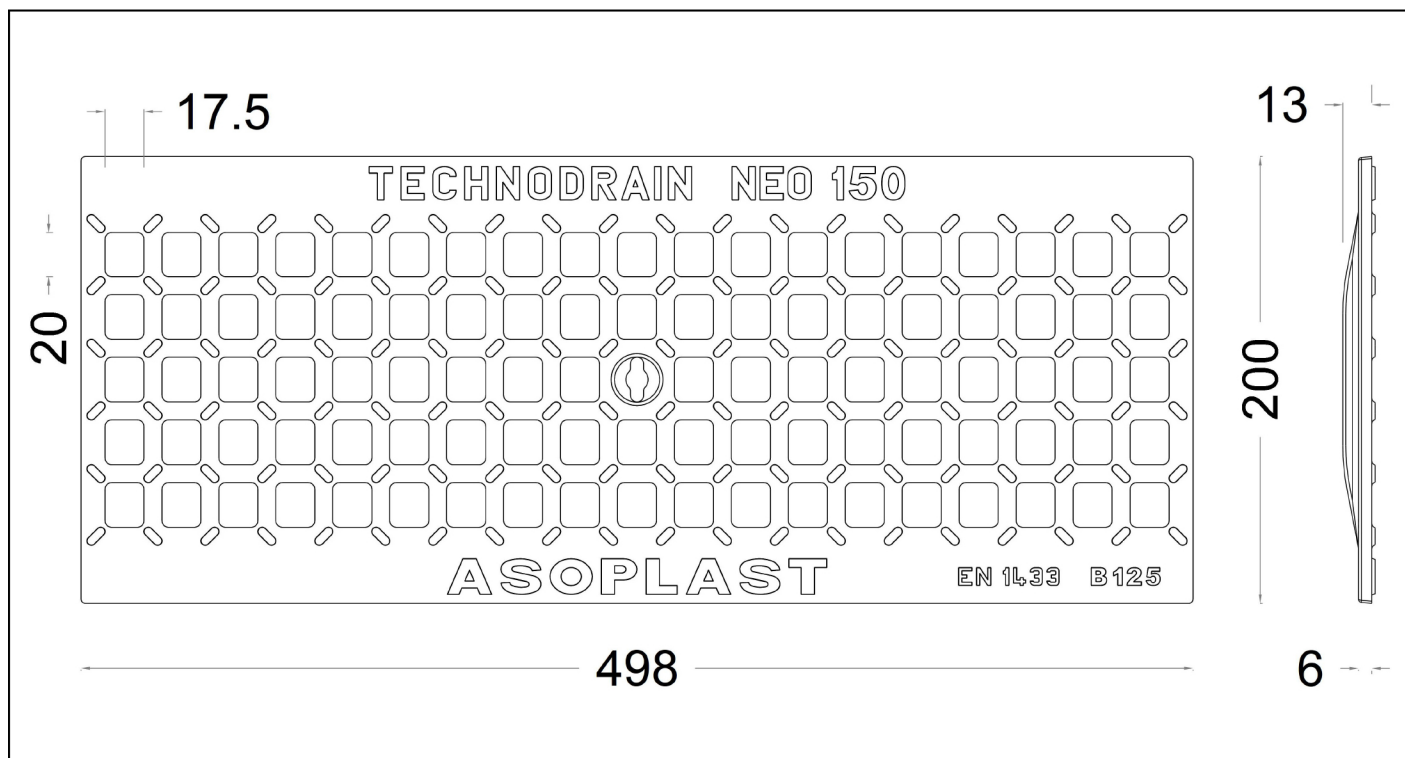

Dimensions and technical specifications

Lenght / Overall width (mm)	498 / 200
Height / Overall height (mm)	6 / 13
Internal width (mm)	150
Material	Ductile iron EN GJS 500/7
Weight (Kg)	3,35
Mesh size (mm)	20x17,5
Drainage area (cm ²)	329
Fixing system	No. 1 bar per grating
Surface coating	Black paint
Loading class (EN 1433)	B125

N.B. Dimensions and weights are subjected to normal manufacturing tolerances.

Compatible Technodrain channels

Code / model

CA150NS - Neo 150S (150/75)

CA150NMS - Neomax 150S (150/75)

CA150NH - Neo 150H (150/150)

CA150NMH - Neomax 150H (150/150)

