


HDPE drainage channel Wavedrain 90 with integrated HDPE protection edges

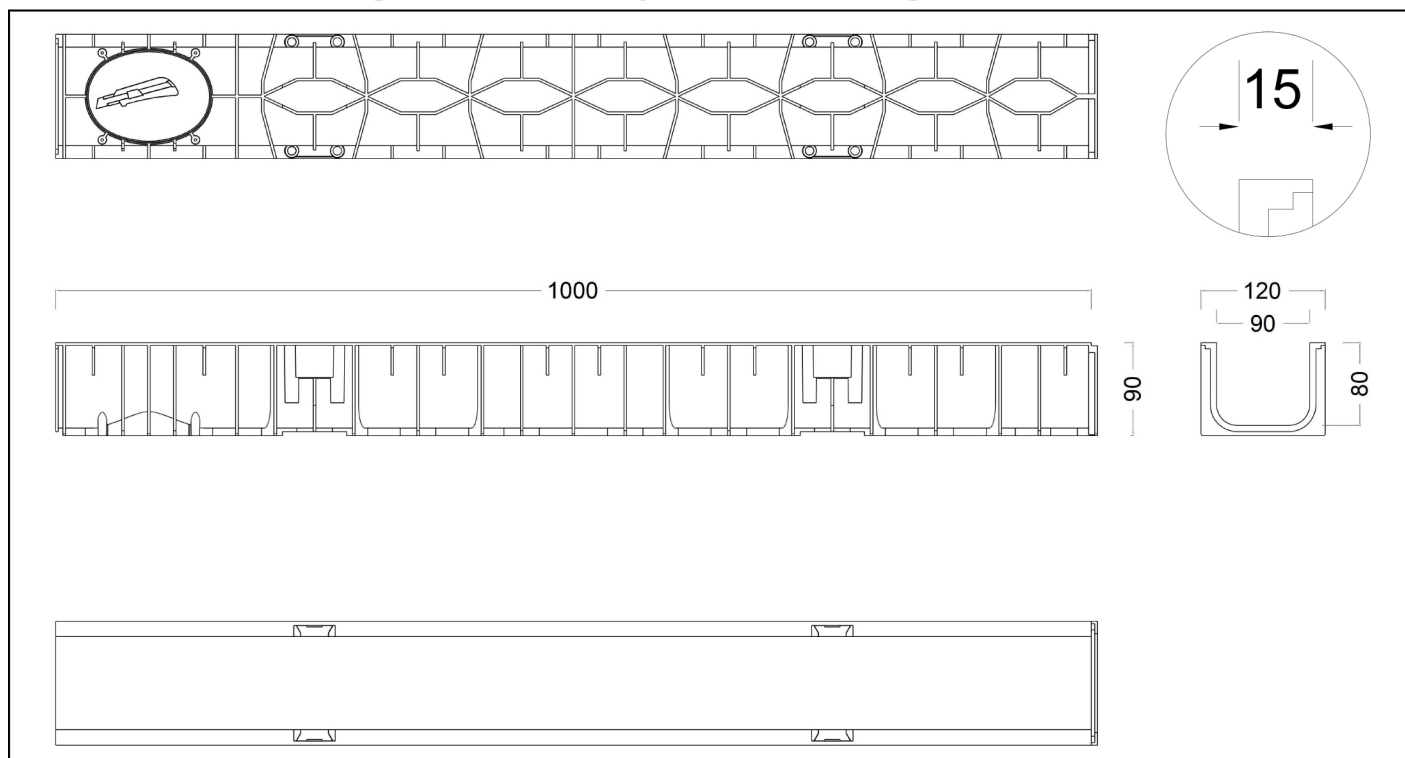

The connection between channels is made using a tongue and groove interlock and joint waterproofness is ensured by using a bituminous-based mastic. Alternatively, complete impermeability can be reached by heat welding the joint.

Dimensions and technical specifications - Type M EN1433

Overall Length / Overall Width including edges (mm)	1000 / 120
Internal Height / Overall Height including edges (mm)	80 / 90
Internal Width - clear opening (mm)	90
Thickness of HD-PE protection edges (mm)	15
Side / Vertical outlets (Ø mm)	1xØ100 or 1xØ110
Material	HD-PE Black
Channel weight with protection edges (Kg)	1,0
Drainage section (cm ²)	70,3
Volume (dm ³)	7,03
Gratings fixing systems	N. 2 bars per m.

N.B. Dimensions and weights are subject to normal manufacturing tolerances.


Compatible gratings EN1433 A15

Code / model

GRPWD90Z / Galvanized slotted grating A15



Galvanized slotted grating Wavedrain 90 A15

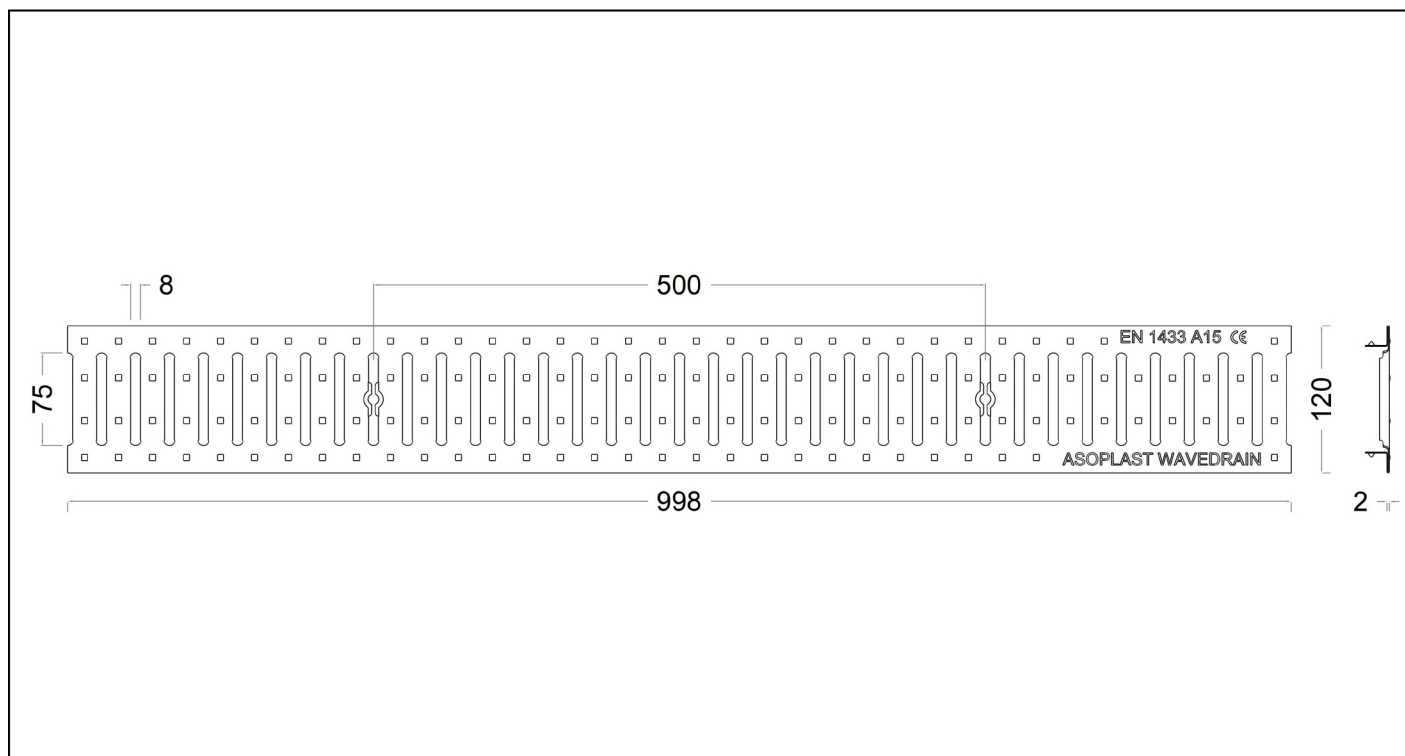

Dimensions and technical specifications

Lenght / Overall width (mm)	998 / 120
Height (mm)	2
Internal width (mm)	90
Material	Galvanized steel
Weight (Kg)	1
Slot dimension (mm)	75X8
Drainage area (cm ²)	216
Fixing system	No. 2 tie bars
Loading class (EN1433)	A15

N.B. Dimensions and weights are subjected to normal manufacturing tolerances.

Compatible Technodrain channels

Code / model

CAWD90 - Wavedrain 90

